



DEMO BOARD TEST REPORT

NO Y NO CM Filter 12V1A Adapter using KP23223SG

FEATURES

- Primary-Side-Control without Opto-Coupler or Secondary Feedback Circuit
- No Y Capacitor, No CM Filter Design
- High Precision 12V Output
- Meet DoE Level VI and CoC V5 Tier2
- Less than 75mW Standby Power
- Meet EN55022 Conducted and Radiated EMI Requirement
- Strong ESD Capability
- Single Failure Protections for power supply
- Comprehensive Protections:
 - VDD OVP& UVP & Clamp
 - On-Chip Thermal Shutdown (OTP)
 - Short Load Protection (SLP)
 - FB Over Voltage Protection (FB OVP)

INTRODUCTION

The Demo Board of KP23223SG-D01 is typically designed for the application of 12V/1A adapter with universal input (90-265Vac,60/50Hz). The demo board adopts the design of no Y capacitor and no CM filter to save cost. Besides, the demo board passes EN55022 Class B EMI Standard and meets DoE Level VI and CoC V5 tier2 energy efficiency standard with comprehensive protections.

APPLICATIONS


- AC/DC Power Adapter

DEMO BOARD SEPCIFICATION

Description	Symbol	Min.	Typ.	Max.	Unit	Note
Input Voltage	V_{in}	90	-	265	V_{ac}	50/60Hz
Output Voltage	V_{out}	-	12	-	V_{dc}	
Output Current	I_{out}	-	1	1.412	A	
Total Output Power	P_{out}	-	12	-	W	
Ripple & Noise	V_{ripple}	-	-	114	mV _{p-p}	Line End (AWG 24#, 1.5m), 20MHz Bandwidth
System Average Efficiency	η	>84.26			%	Meets DoE Level VI and CoC V5 Tier2, Board End
Standby Power Consumption	P_{st}	-	-	57.57	mW	@230Vac/50Hz
Startup Time	T_{st}	-	2.262	-	s	Tested at 90Vac/60Hz
Conductive EMI Margin	-	+6	-	-	dB	EN55022 Class B
Radiant EMI Margin	-	+3.5	-	-	dB	EN55015
Surge Test	-	>4.5	-	-	KV	Differential Mode @ 220Vac/50Hz
	-	>4.5	-	-	kV	Common Mode @ 220Vac/50Hz
ESD (Contact/Air Discharge)	-	9/16	-	-	kV	On each Output Terminals +/-
Operating Ambient		0		40	°C	
Operating Humidity		5		95	%R.H.	


The table above shows the minimum acceptable performance of the design. Actual performance is listed in the results section.

Demo Board of KP23223SG-D01

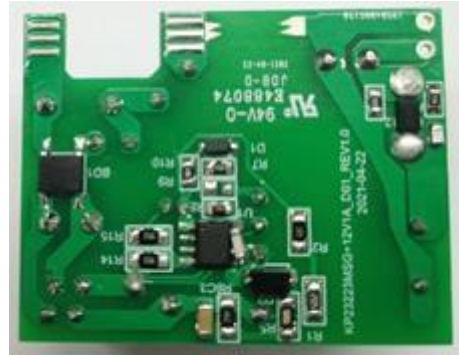


Board Size (in mm): L x W x H= 47.9mm x 37.3mm x 20.3mm

Schematic

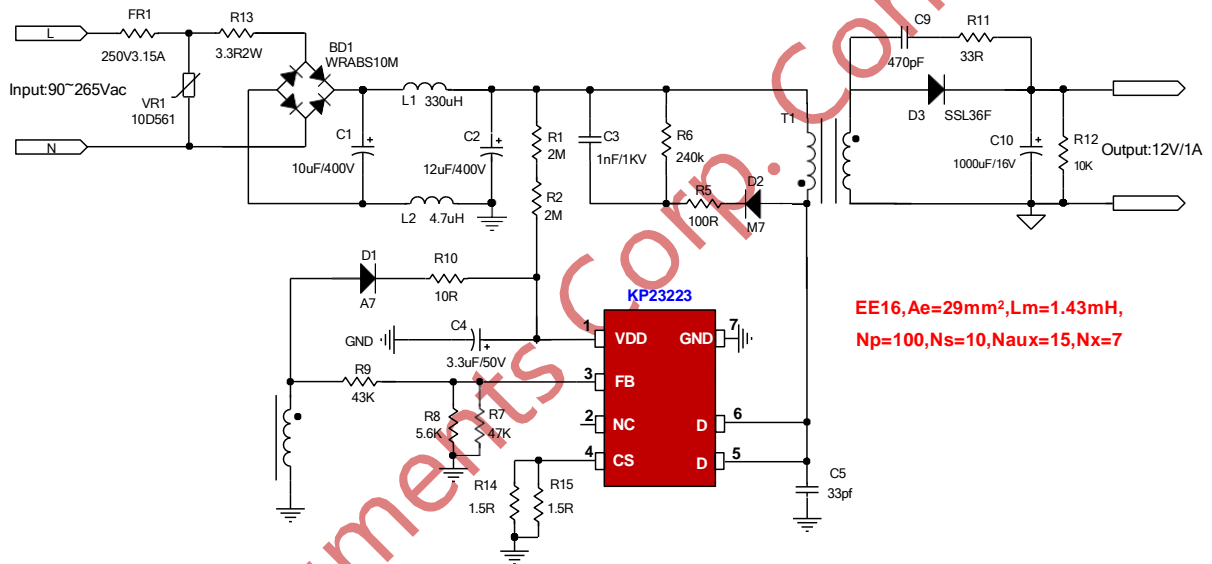


Printed Circuit Board Layout

Top Layer

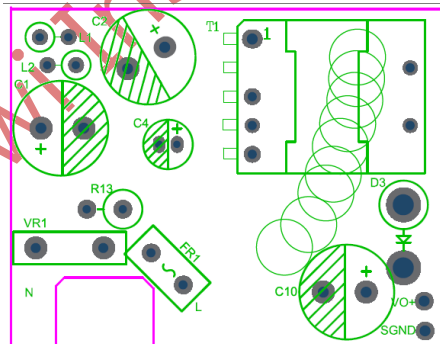

Bottom Layer

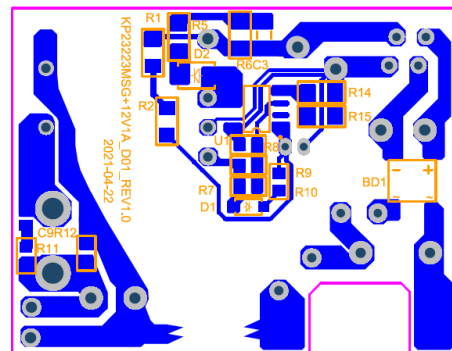




**Demo Board Test Report ---- High Performance 12V1A Adapter using
PSR CC/CV Regulator KP23223SG**

Bill of Material


No.	Designator	Value	Description	Package	Manufacturer	Part Number
1	BD1	WRABS 10M	Ultra-soft Recovery Bridge(VF=1V@IF=0.5A)	ABS	WORLD	Any
2	C1	10uF/400V	Electrolytic Cap, 400V,10*13	TH	AiSHi	Any
3	C2	12uF/400V	Electrolytic Cap,400V,10*17	TH	AiSHi	Any
4	C3	1nF/1000V	Ceramic Cap, 1KV X7R	1206	Murata	Any
5	C4	3.3uF/50V	Electrolytic Cap, 50V, 5*11.5	TH	jianghai	Any
6	C5	33pF/1000V	Ceramic Cap, 1000V X7R	1206	WE	Any
7	C9	470pF/50V	Ceramic Cap, 50V NPO	0805	WE	Any
8	C10	1000uF/16V	Electrolytic Cap,10*16	TH	AiSHi	Any
9	D1	1KV/1A	Fast Recovery Rectifiers, TRR=130ns(VF=1.1V@IF=1A)	SOD-123S	YEA SHIN	A7
10	D2	1KV/1A	Fast Recovery Rectifiers, TRR=150ns(VF=1.1V@IF=1A)	SMA	YEA SHIN	M7
11	D3	60V/3A	Surface Mount Schottky Barrier Rectifiers	SMA	Jingdao	SSL36F
12	FR1	3.15A/250V	4T T3.15 AL 250V	TH	Any	Any
13	R1, R2	2M	Film Resistor, 5%	1206	Yageo	Any
14	R5	100R	Film Resistor, 5%	1206	Yageo	Any
15	R6	240K	Film Resistor, 5%	1206	Yageo	Any
16	R7	47K	Film Resistor, 5%	0805	Yageo	Any
17	R8	5.6K	Film Resistor, 5%	0805	Yageo	Any
18	R9	43K	Film Resistor, 5%	0805	Yageo	Any
19	R10	10R	Film Resistor, 1%	0805	Yageo	Any
20	R11	33R	Film Resistor, 5%	0805	Yageo	Any
21	R12	10K	Film Resistor, 5%	0805	Yageo	Any
22	R13	3.3R	Fuse Resistor,2W	TH	Any	Any
23	R14, R15	1.5R	Film Resistor, 1%	1206	Yageo	Any
24	L1	330uH	Color circle Coils	0512	Any	Any
25	L2	4.7uH	Color circle Coils	0307	Any	Any
26	VR1	10D561	Disk Varistor High-Surge WE	10D	Any	Any
27	T1	1.43mH	EE16, L=1.43mH, Np :Ns :Naux=100:10:15	EE16	Any	Any
28	U1	KP23223SG	High Performance Primary Side Regulation CV/CC Power Switch	SOP-7	Kiwi Instruments	KP23223SG

Transformer Manufacture Guide

1. Electrical Diagram

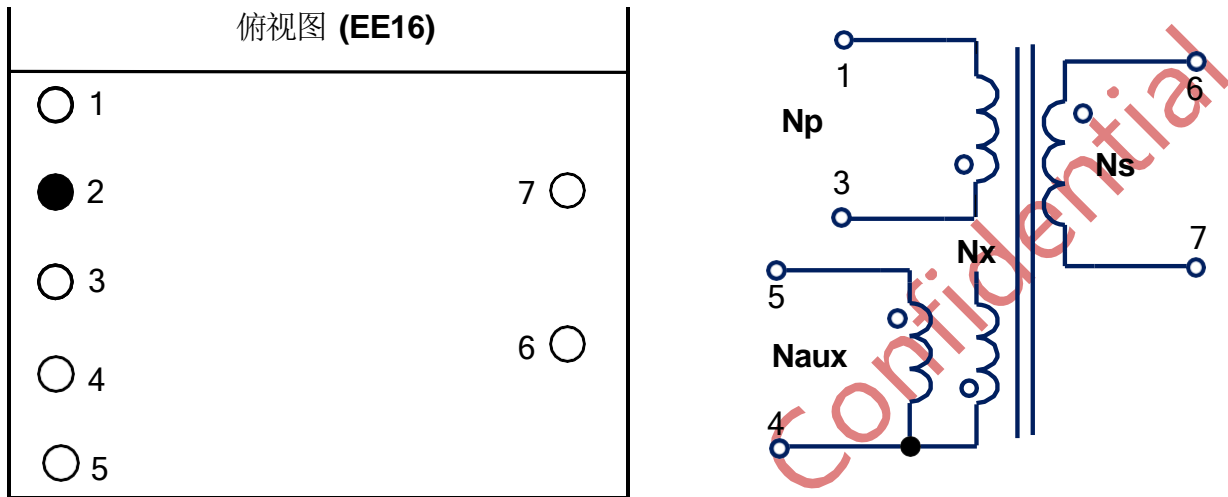

2. Winding Diagram

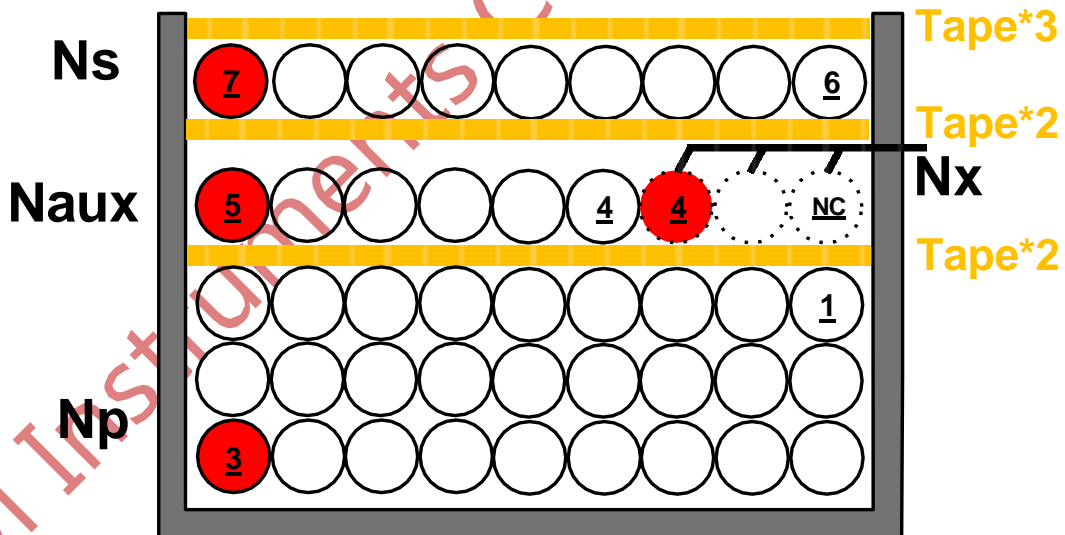

3. Winding Order

Number	Winding	Layer	Start	End	Wire Size	Turns	Note
1	N _p	Primary	3	1	0.23d*1P	100T	Dense
2	N _{aux}	Primary	5	4	0.15d*2P	15T	Dense
3	N _x	Primary	4	NC	0.15d*2P	7T	
4	N _s	Secondary	7	6	0.6d*1P (TEX-E)	10T	Dense Reverse Wound

4. Electrical Specification

Items	Test Condition	Test Pin	Specification
Primary Inductance	Measured at 40kHz, 1.0 VRMS	Pins 3 - 1, all other windings open,	1.43mH± 5%
Primary Leakage Inductance	Measured at 40kHz, 1.0 VRMS	Pins 3 - 1, all other windings shorted,	37.16uH
HI-POTHV Test	3500Vac/50Hz, One minute	Primary to Secondary	PASS
DC Resistance	-	Pins 3 - 1	1.38R

5. Transformer BOM

Items	Description
1	Core: EE16, PC95, AE=29mm ²
2	Bobbin: EE16, Horizontal, 5+2 pin
3	Wire: 0.23φ 2UEW 130°C
4	Wire: 0.15φ 2UEW 130°C
5	Triple Insulation Wire: 0.6φ TEX-E 130°C
6	Tape: W=8.6mm



Test Result

1. Input Characteristics

1.1. No Load Input Power Dissipation

Standard: while input 115Vac~230Vac and the output is no load, the input power loss must be less than 75mW.

Result: PASS.

$V_{IN(AC)}$	90	115	230	265	green mode limit	Result
$P_o=0W$	30.64mW	33.38mW	57.57mW	69.13mW	75mW	PASS

Kiwi Instruments Corp. Confidential


1.2. Average Efficiency

Standard: while input 115Vac and 230Vac, the average efficiency is more than 83.4%.

Test Condition: Board End

Result: PASS.

V _{in} (Vac)	F _{line} (Hz)	P _{in} (W)	V _{out} (V)	I _{out} (A)	P _{out} (W)	Eff (%)	Eff_AVG(%)	COC_V5(%)
115	60	14.564	12.26	1	12.26	84.18	84.26	83.39
		10.842	12.21	0.75	9.1575	84.46		
		7.1844	12.16	0.5	6.08	84.63		
		3.6021	12.07	0.25	3.0175	83.77		
		1.4959	11.99	0.1	1.199	80.15	80.15	73.39
230	50	14.426	12.29	1	12.29	85.19	84.47	83.40
		10.766	12.2	0.75	9.15	84.99		
		7.1983	12.14	0.5	6.07	84.33		
		3.6695	12.03	0.25	3.06	83.39		
		1.6132	12.04	0.1	1.204	74.63	74.63	73.40


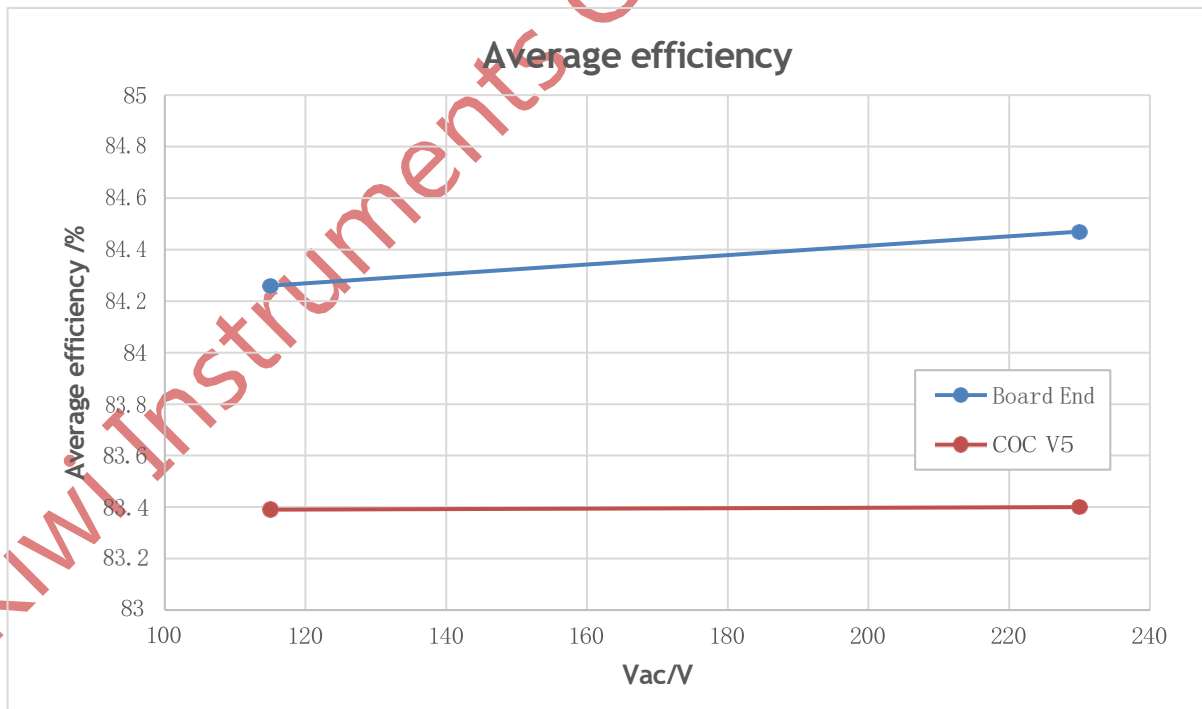


2. Output Characteristics

2.1. Ripple & Noise


Standard: under the input voltage 90Vac~265Vac, output with 1.5m AWG24# cable, $V_{ripple} < 120mV_{p-p}$.

Result: PASS.

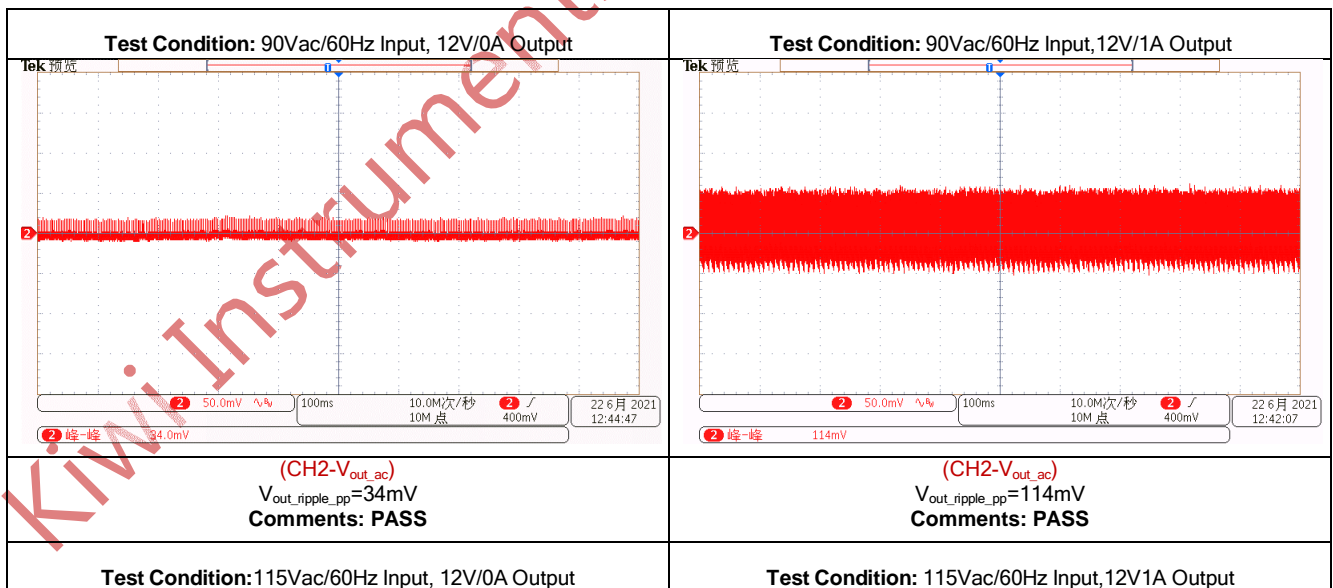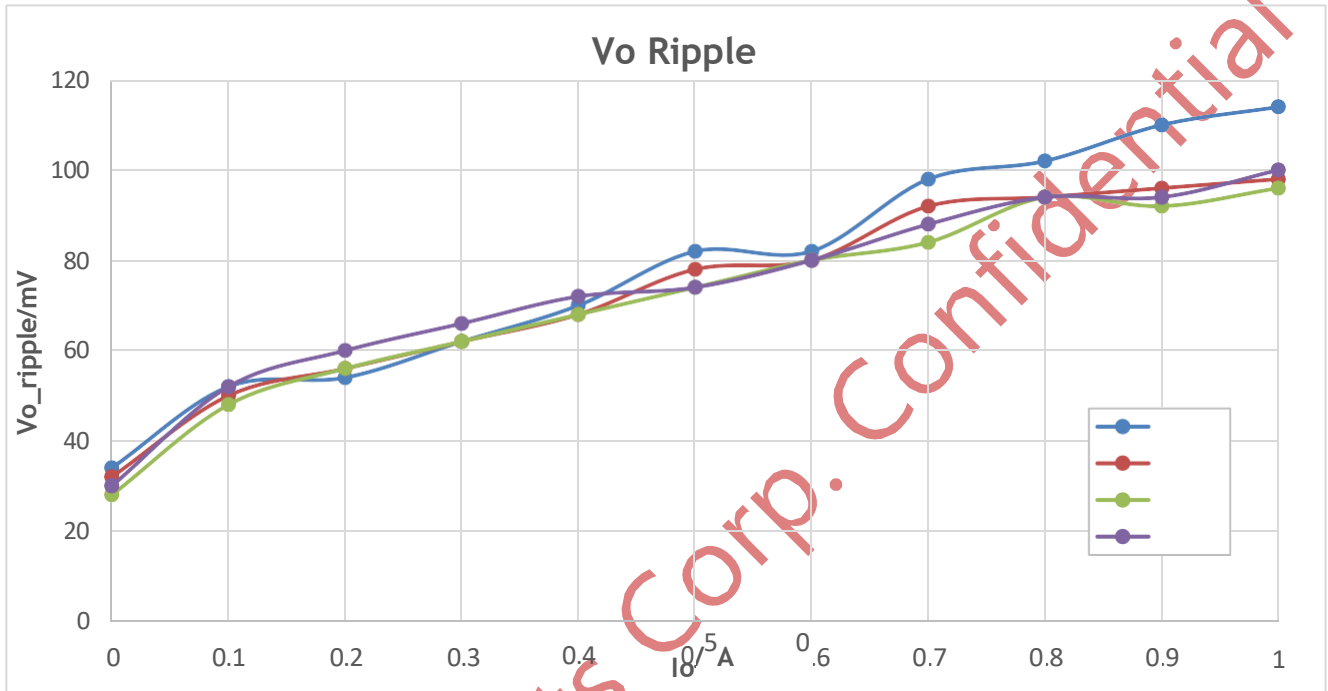



Demo Board Test Report ---- High Performance 12V1A Adapter using PSR CC/CV Regulator KP23223SG

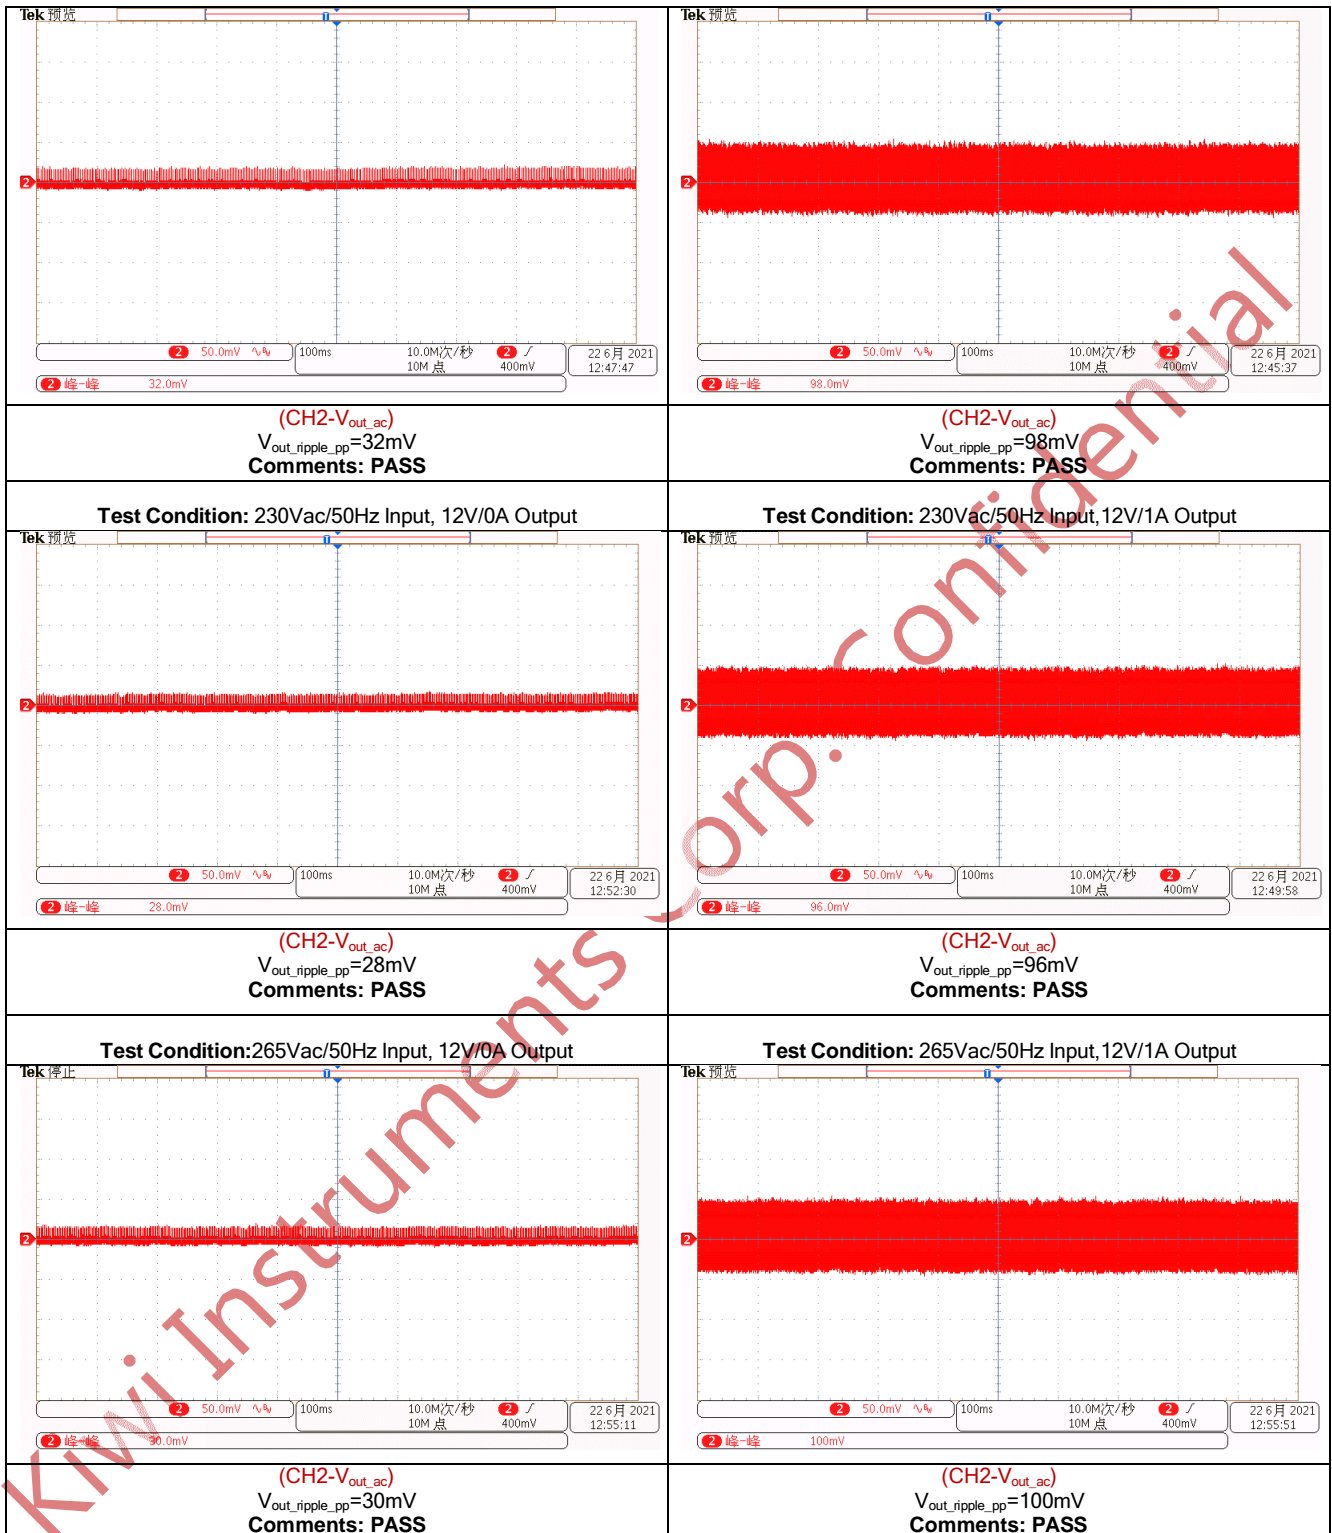




2.2. Output Voltage / Current Characteristics

Standard: Output voltage regulation < 3%, output current regulation < 3%.


Result: PASS.

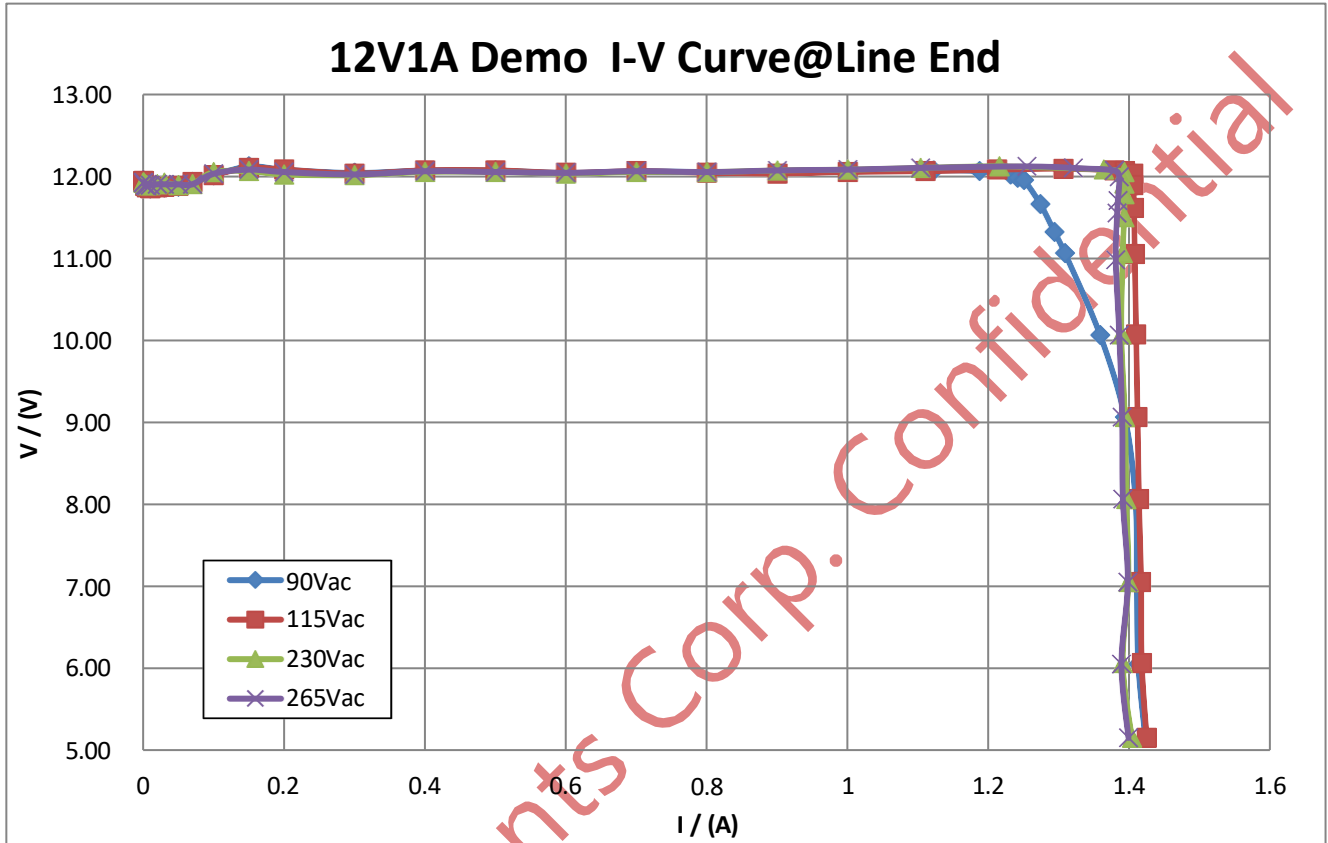

2.3. Start Time & Rise Time

Standard: Start time < 3s @ 90Vac input & full load; Rise time < 20ms @ full load.


Result: PASS.

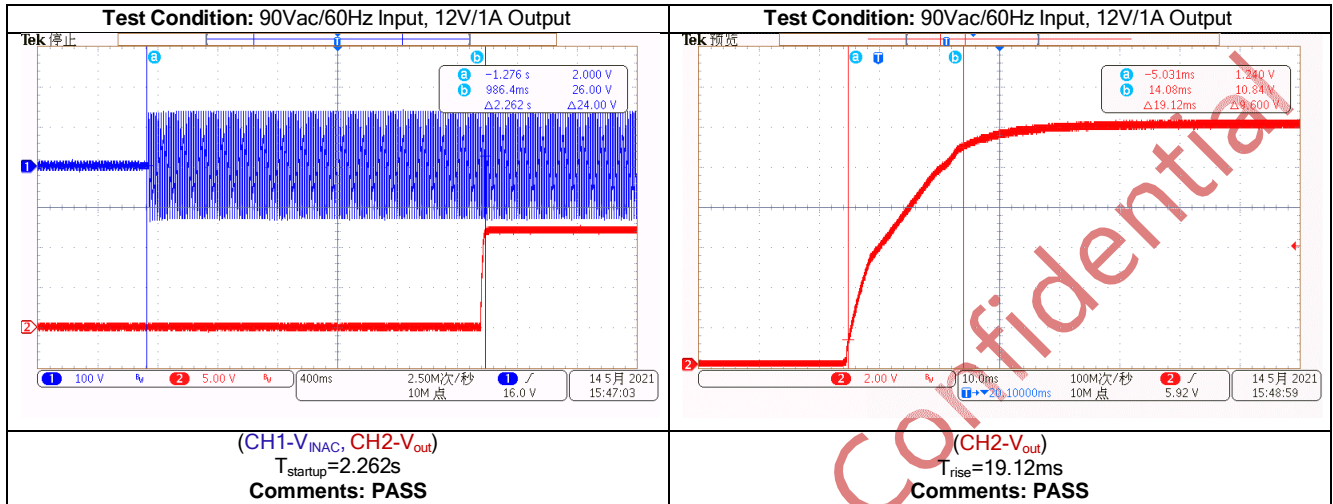

2.4. Hold-up Time

Standard: 10ms min @ 115Vac/230Vac input & full load.

Result: PASS.

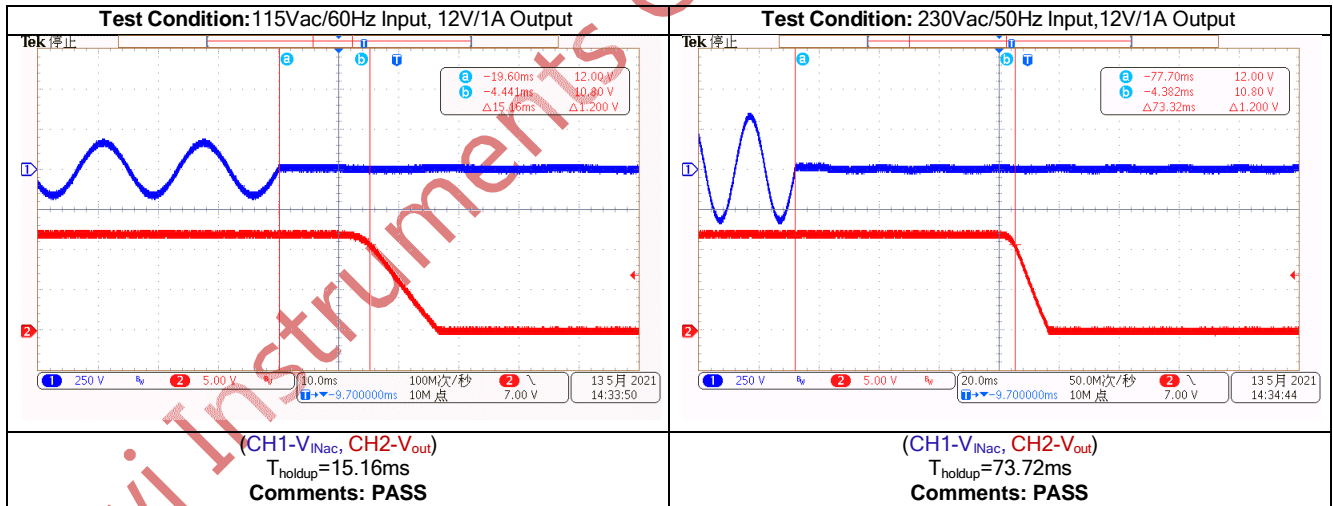


2.5. Output Overshoot

Standard: Output overshoot < 5%.

Result: PASS.

Test Condition: 90Vac/60Hz Input, 12V/0A Output	Test Condition: 90Vac/60Hz Input, 12V/1A Output
---	---

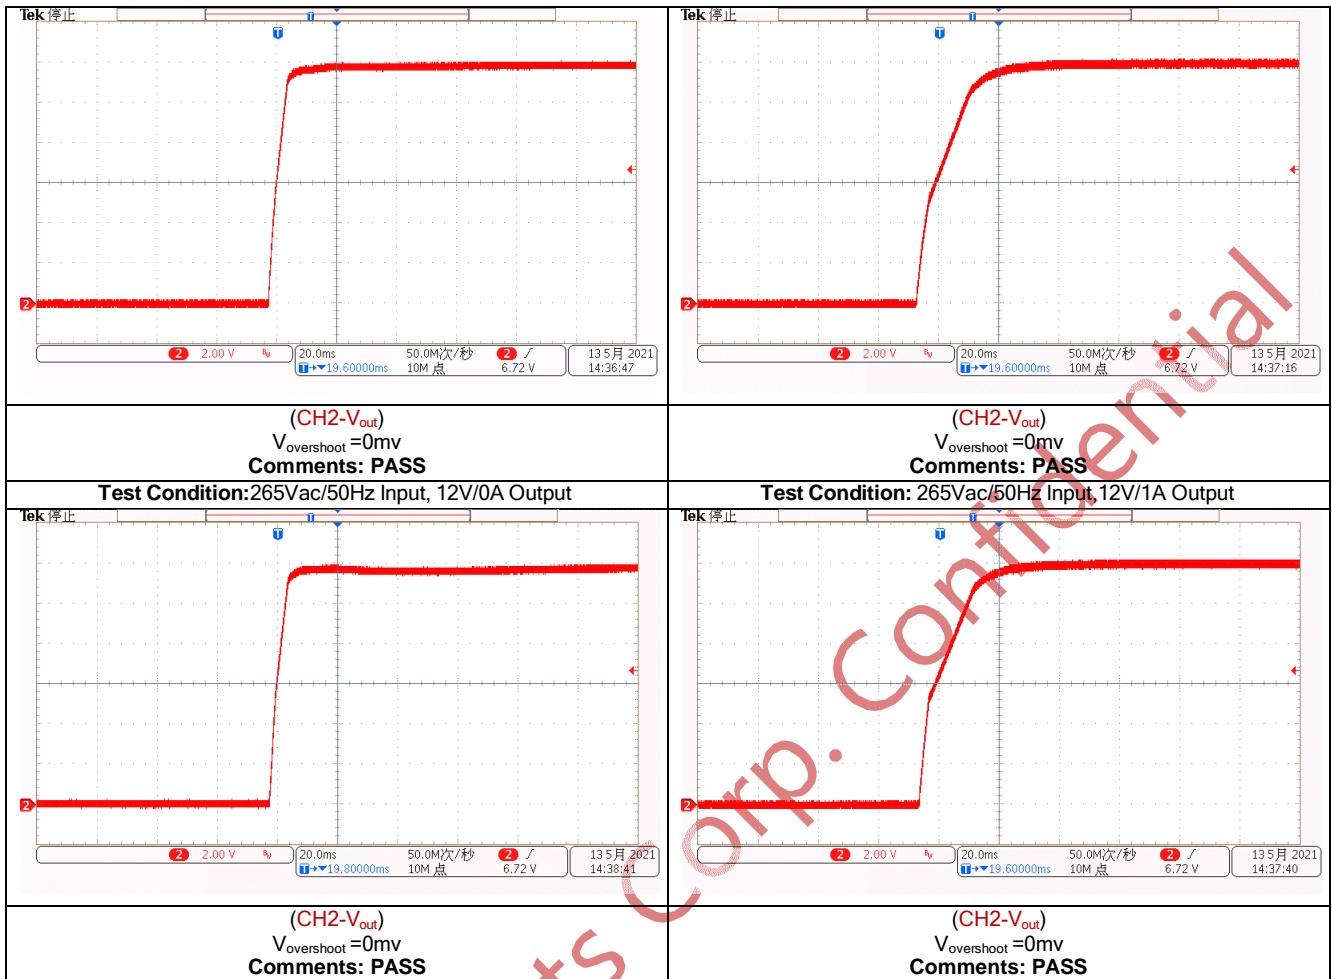

2.6. Load Transient Test

Standard: 1) RUIDIR : Under the input voltage 90Vac~265Vac, the output Voltage transient response should be within 11.4V-12.6V (25% load shift to 75% load with 0.25A/us changing ramp and 250Hz changing frequency.).

2) Europe Standard: Under the input voltage 90Vac~265Vac, the output Voltage transient response should be within 10.8V-13.2V (5% load shift to 55% load, 50% load shift to 100% load with 0.1A/us changing ramp, 500Hz-1KHz changing frequency and 10%-50% duty cycle.).

3) DIWEN Standard: Under the input voltage 90Vac~265Vac, the output Voltage transient response should be within 10.2V-13.8V (10% load shift to 90% load with 0.1A/us changing ramp and 100Hz changing frequency.).


Result: PASS.

Test Condition: 90Vac/60Hz Input, 25% to 75%, 250Hz, 50%	Test Condition: 265Vac/50Hz Input, 25% to 75%, 250Hz, 50%
--	---



Demo Board Test Report ---- High Performance 12V1A Adapter using PSR CC/CV Regulator KP23223SG


<p align="center">(CH2-Vout) VH =12.6V, VL=11.7V Comments: PASS</p>	<p align="center">(CH2-Vout) VH =12.6V, VL=11.7V Comments: PASS</p>
<p align="center">Test Condition: 90Vac/60Hz Input, 5% to 55%, 500Hz,50%</p>	<p align="center">Test Condition: 265Vac/50Hz Input, 5% to 55%, 500Hz,50%</p>
<p align="center">(CH2-Vout) VH =12.6V, VL=11.7V Comments: PASS</p>	<p align="center">(CH2-Vout) VH =12.6V, VL=11.7V Comments: PASS</p>
<p align="center">Test Condition:90Vac/60Hz Input, 50% to 100%, 500Hz,50%</p>	<p align="center">Test Condition: 265Vac/50Hz Input, 50% to 100%, 500Hz,50%</p>
<p align="center">(CH2-Vout) VH =12.4V, VL=11.6V Comments: PASS</p>	<p align="center">(CH2-Vout) VH =12.4V, VL=11.6V Comments: PASS</p>
<p align="center">Test Condition:90Vac/60Hz Input, 10% to 90%, 100Hz,50%</p>	<p align="center">Test Condition: 265Vac/50Hz Input, 10% to 90%, 100Hz,50%</p>

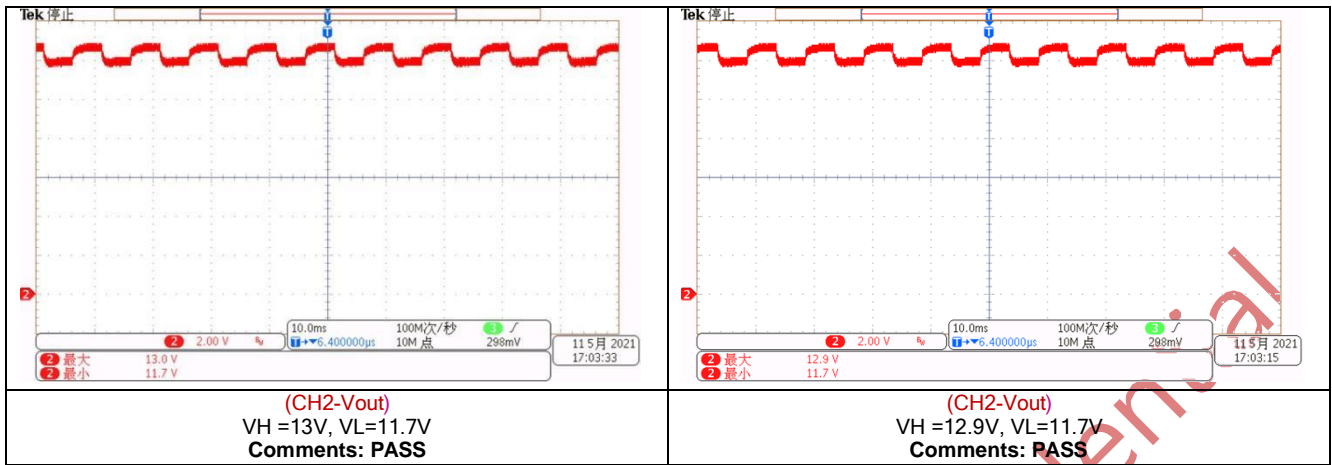

2.7. Capacitance Load Test Standard:

Capacitance load: 3000uF @ 12V1A. **Result:**

PASS.

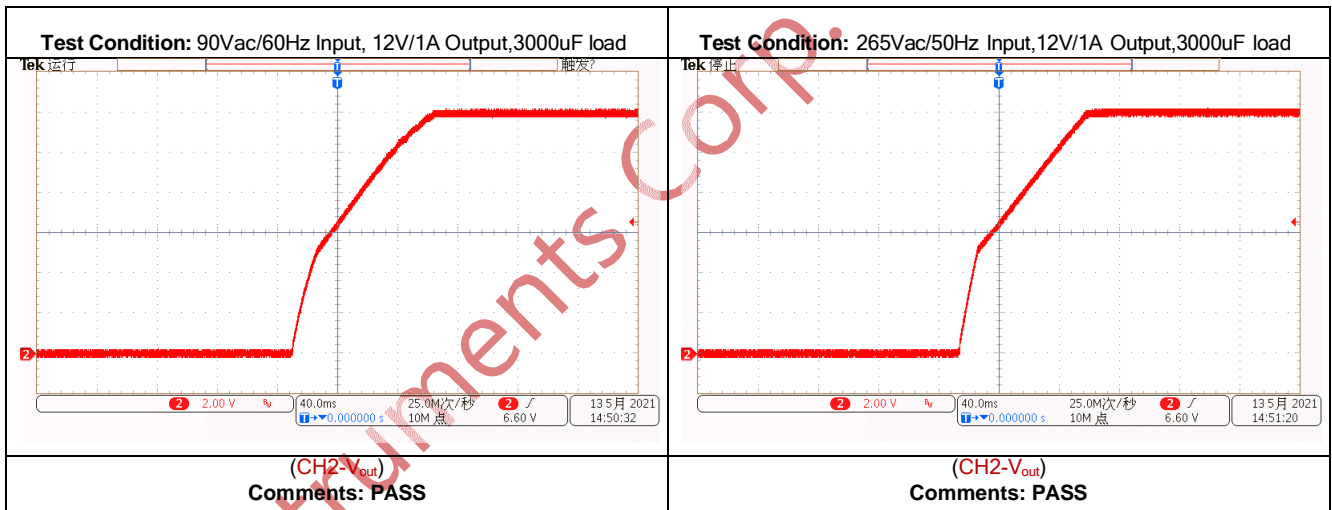

3. Protection Requirements

3.1. Over Current Protection


Standard: OCP point limited is between 1.2A~2A.

Result: PASS.

V _{out}	90V	115V	230V	265V	Result
11V	1.313A	1.412A	1.389A	1.378A	PASS
10V	1.355A	1.408A	1.386A	1.381A	PASS

3.2. Short Circuit Protection

Standard: Shorting of output will not cause power supply to damage or any safety hazard. The power supply shall resume normal operation after short is removed.

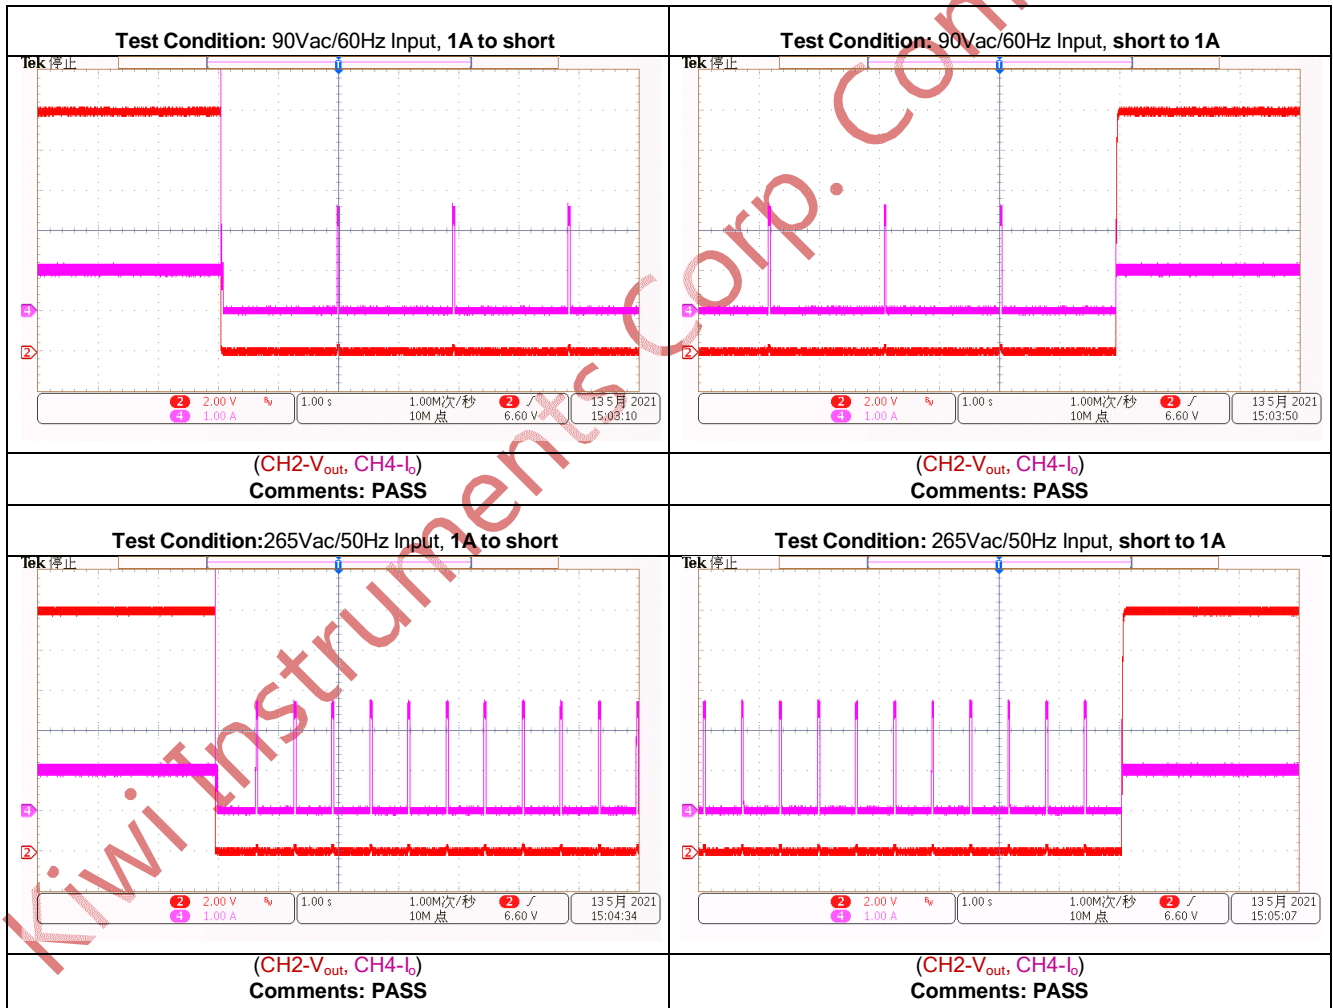

3.3. Single Failure Protections

KP23223SG integrates single failure protections which can ensure no damage to IC and no over voltage of output in the event of single point of failures.

No	Single Failure Protection	Standard	Result
1	FB pull-up resistor open protection	The power supply must shut-down in the event of single failure and automatically return to normal operating condition once the fault condition has been removed. The output voltage should be less than 18V.	PASS
2	FB pull-down resistor open protection		PASS
3	FB pull-down resistor short protection		PASS
4	Transformer windings short protection		PASS
5	Rcs open protection		PASS
6	Rectifier diode or SR short protection		PASS

Kiwi Instruments Corp. Confidential

4. Reliability Requirements


4.1. Thermal Test

Test Condition: Ambient Temperature: 25°C and steady environment with no airflow, Ta is the temperature inside the plastic box.

Standard: IC : $\Delta T < 75^\circ\text{C}$. Transformer: $\Delta T < 70^\circ\text{C}$.

Result: PASS.

Component	90Vac		265Vac	
	Ta=27.3°C		Ta=27.4°C	
	Tc(°C)	T _{rise} (°C)	Tc(°C)	T _{rise} (°C)
KP23223SG	79.3	52	76.7	49.3
SSL36F	78.4	51.1	79.1	51.7
T Core	65.7	38.4	65.8	38.4
T Windings	70.5	43.2	69.7	42.3

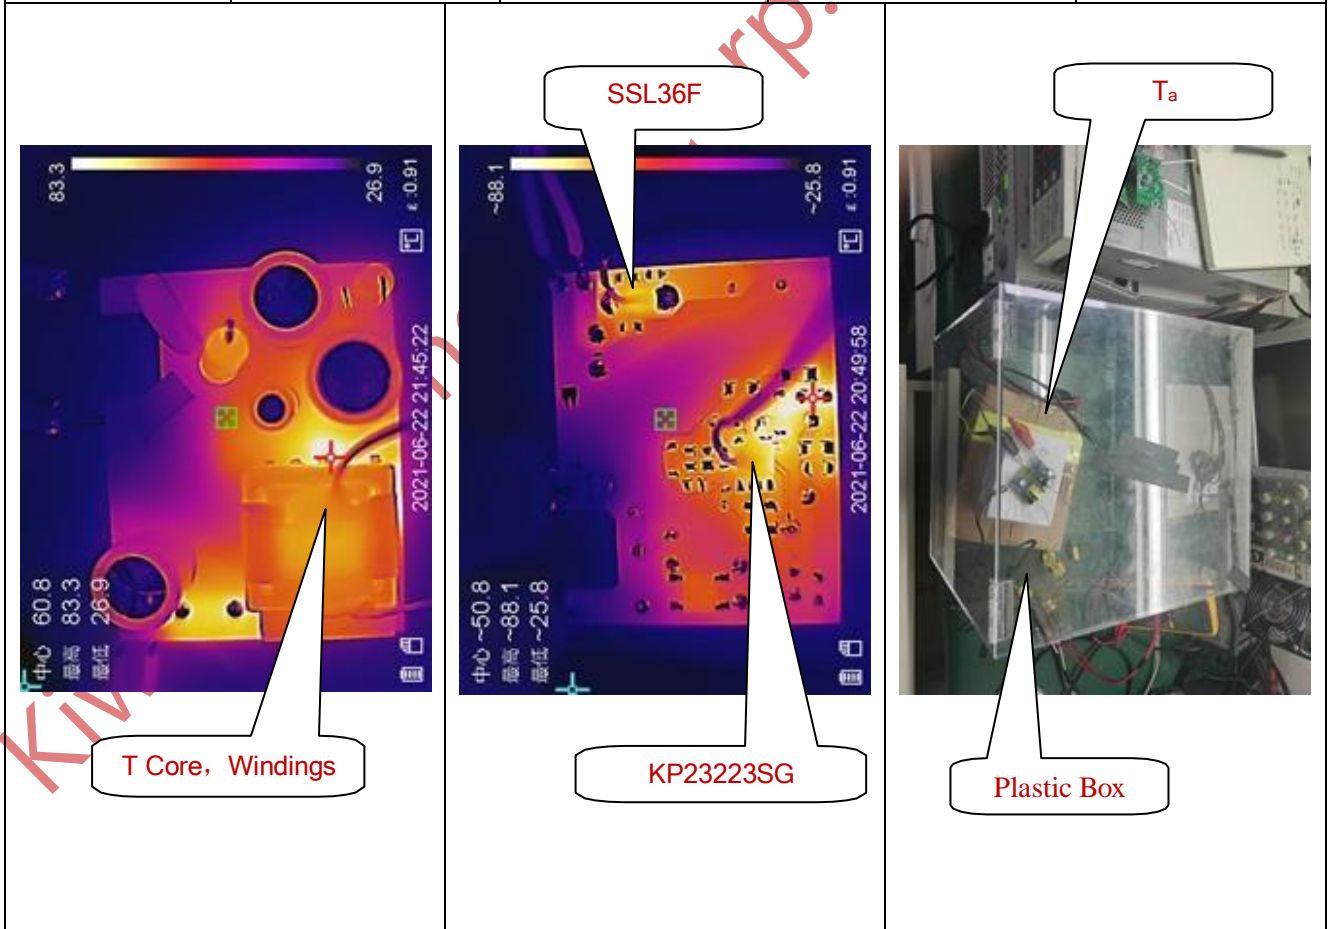

4.2. Device Maximum Rating


Standard: MOSFET, Diode and IC: <95% V_{rm} .

Result: PASS.





Demo Board Test Report ---- High Performance 12V1A Adapter using PSR CC/CV Regulator KP23223SG

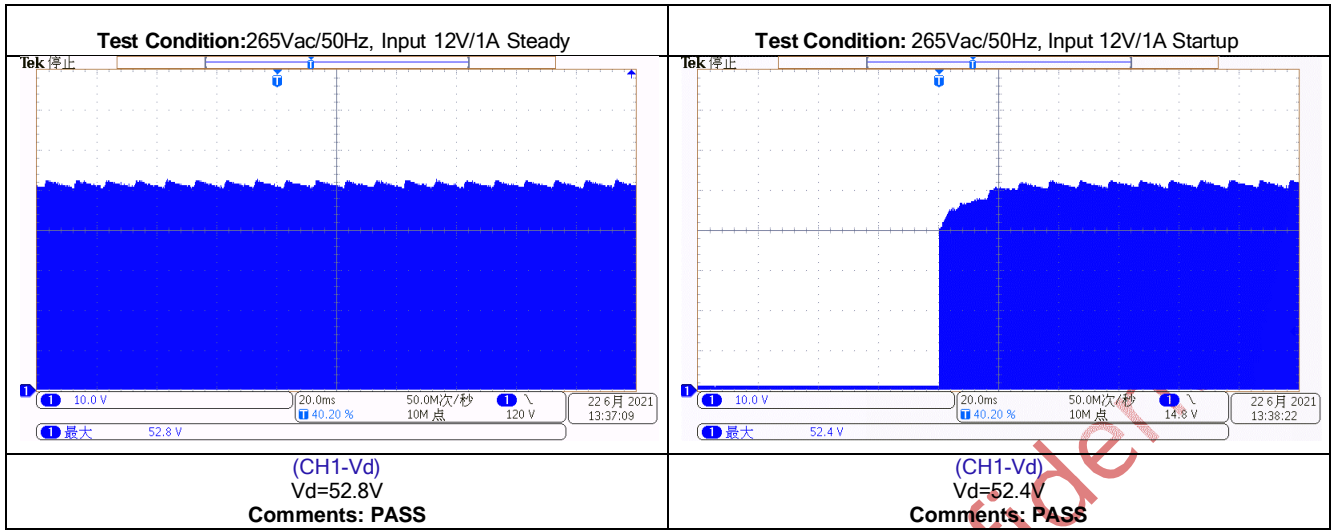


Kiwi Instruments Corp. Confidential

5. EM/EMS


5.1. EMI Standards

standard	EN55022B/55015
content	CE & RE
requirement	3dB margin
Result	PASS

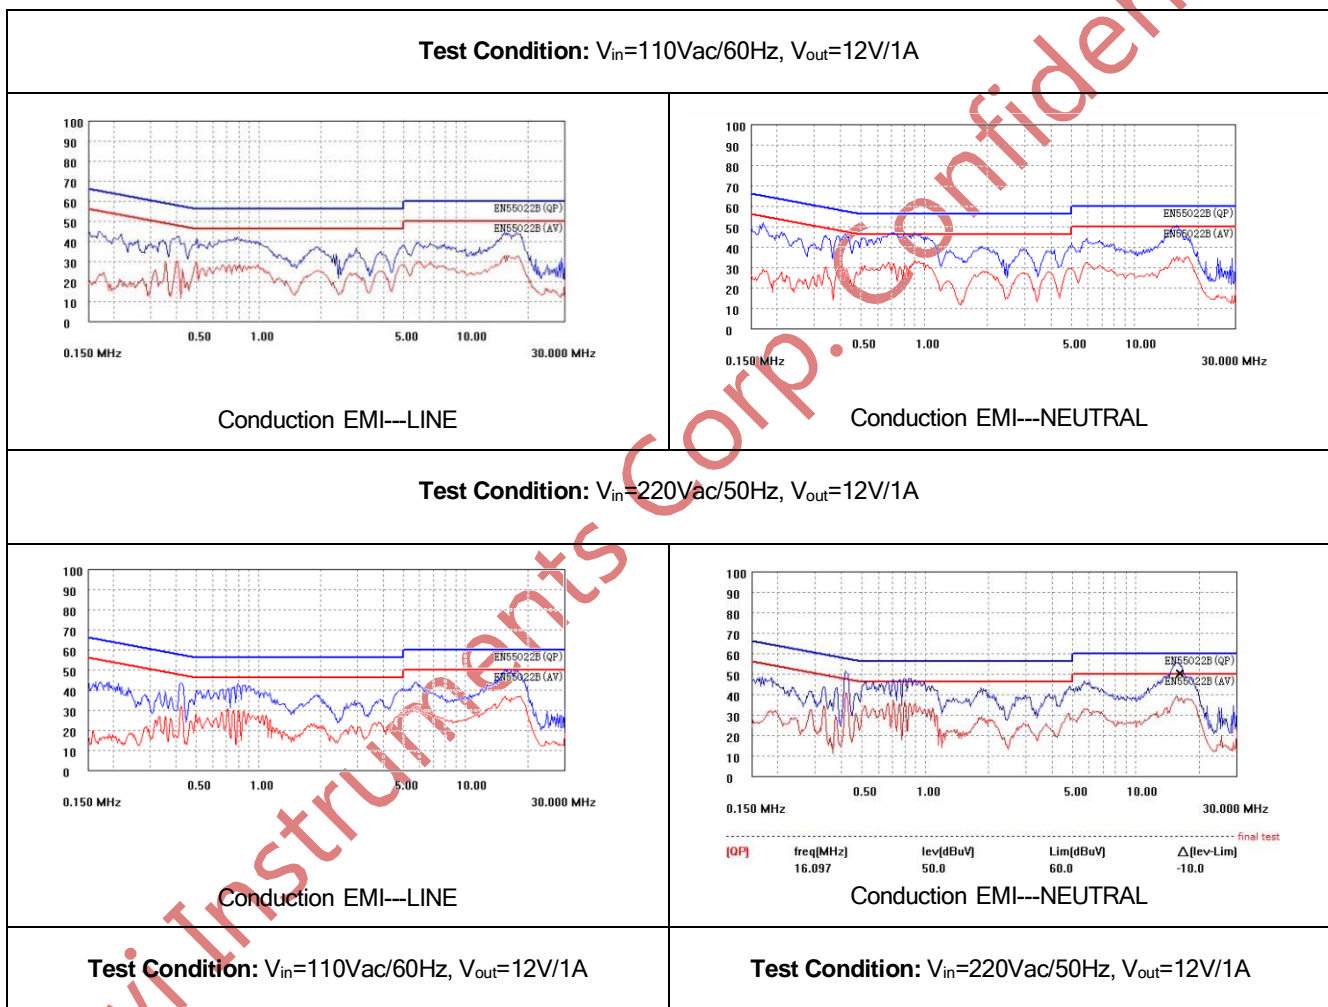




Demo Board Test Report ---- High Performance 12V1A Adapter using PSR CC/CV Regulator KP23223SG

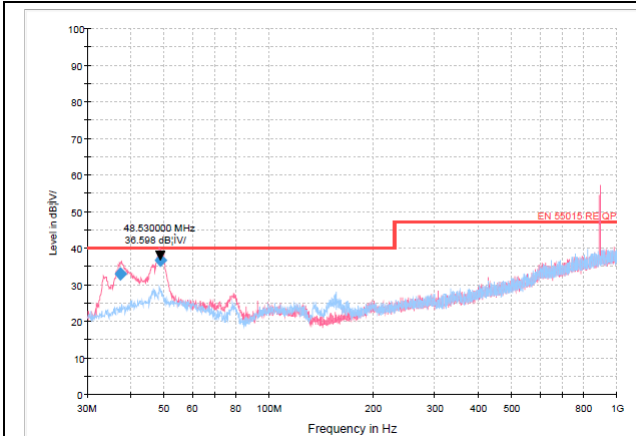

Radiated EMI---Horizontal, Vertical

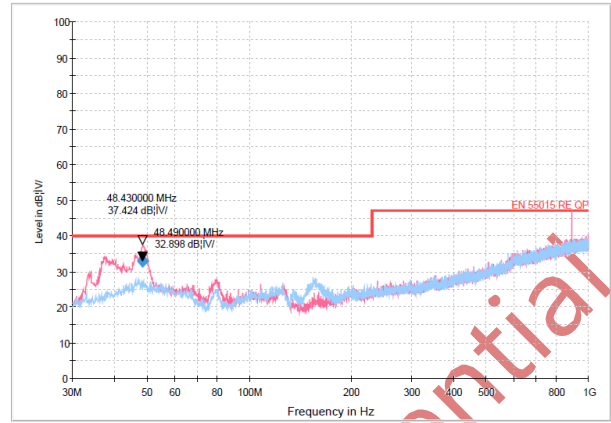

Radiated EMI--- Horizontal, Vertical

Kiwi Instruments Corp. Confidential

5.2. EMS Standards

5.2.1. IEC61000-4-2(ESD)

Test Condition: Input 220Vac/50Hz, Output 12V/1A. Discharge 10 times on each output terminals at each test voltage according to IEC61000-4-2

Standard: Air discharge 15KV, Contact discharge 8KV

Result: PASS

Air Discharge		Contact Discharge	
Test Voltage (kV)	Air Discharge	Test Voltage (kV)	Contact Discharge
13	Pass	5	Pass
-13	Pass	-5	Pass
16	Pass	9	Pass
-16	Pass	-9	Pass

5.2.2. IEC61000-4-5(surge)

Test Condition: Input 220Vac/50Hz, Output 12V/1A. Surge testing was completed according to IEC61000-4-5. Each injection phase below is tested with 5 times and hold for 60 seconds before next one.

Standard: Common mode voltage 4KV, difference mode voltage 4KV.

Result: PASS

Test Result

Injection Location	Surge Level (V)	Injection Phase (°)	Test Result (Pass/Fail)
L to N	+4500	0	PASS
	+4500	90	PASS
	+4500	180	PASS
	+4500	270	PASS
	-4500	0	PASS
	-4500	90	PASS
	-4500	180	PASS
	-4500	270	PASS



**Demo Board Test Report ---- High Performance 12V1A Adapter using
PSR CC/CV Regulator KP23223SG**

L to PE	+4500	0	PASS
	+4500	90	PASS
	+4500	180	PASS
	+4500	270	PASS
	-4500	0	PASS
	-4500	90	PASS
	-4500	180	PASS
	-4500	270	PASS
N to PE	+4500	0	PASS
	+4500	90	PASS
	+4500	180	PASS
	+4500	270	PASS
	-4500	0	PASS
	-4500	90	PASS
	-4500	180	PASS
	-4500	270	PASS
L&N to PE	+4500	0	PASS
	+4500	90	PASS
	+4500	180	PASS
	+4500	270	PASS
	-4500	0	PASS
	-4500	90	PASS
	-4500	180	PASS
	-4500	270	PASS



6. Safety Standards

6.1. Dielectric Strength (Hi-pot)

Standard: primary to secondary: 3500Vac / 5mA /60 seconds.

V(AC)	time	I _{leak} (mA)	Result
3.5KV	60s	0.17	PASS

Kiwi Instruments Corp. Confidential



Revision History

DATE	REV	DESCRIPTION
2021/05/14	1.0	First Release
2021/06/22	2.0	Circuit Design Change

Kiwi Instruments Corp. Confidential

Disclaimer

Information that is provided by Kiwi Instruments Corporation("Kiwi") is believed to be accurate and reliable. Kiwi reserves the right to make any change in circuit design, specification or other related things if necessary without notice at any time. No third party intellectual property infringement of the applications should be guaranteed by users when integrating Kiwi's products into any application. No legal responsibility for any said applications is assumed by Kiwi.